
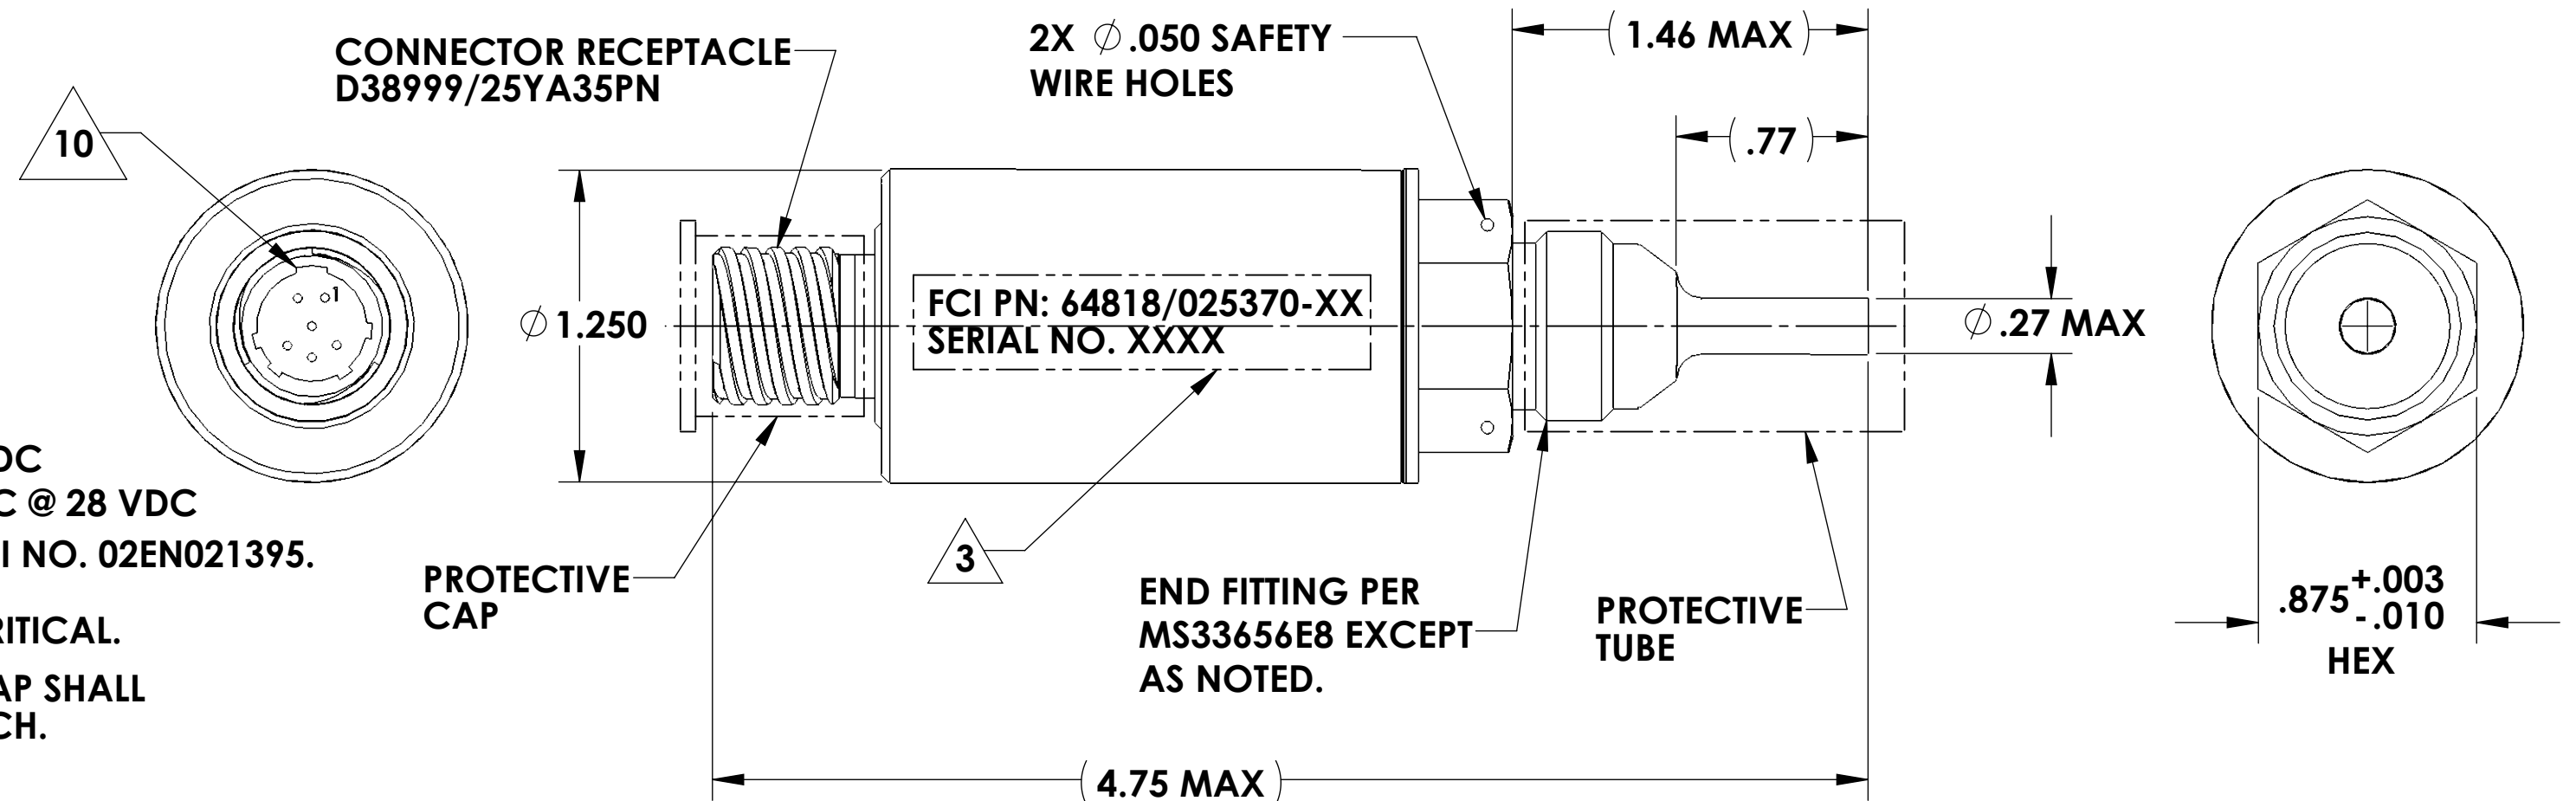


REVISION

DATE _____

7/29/2019

TEMPERATURE SET POINT TABLE

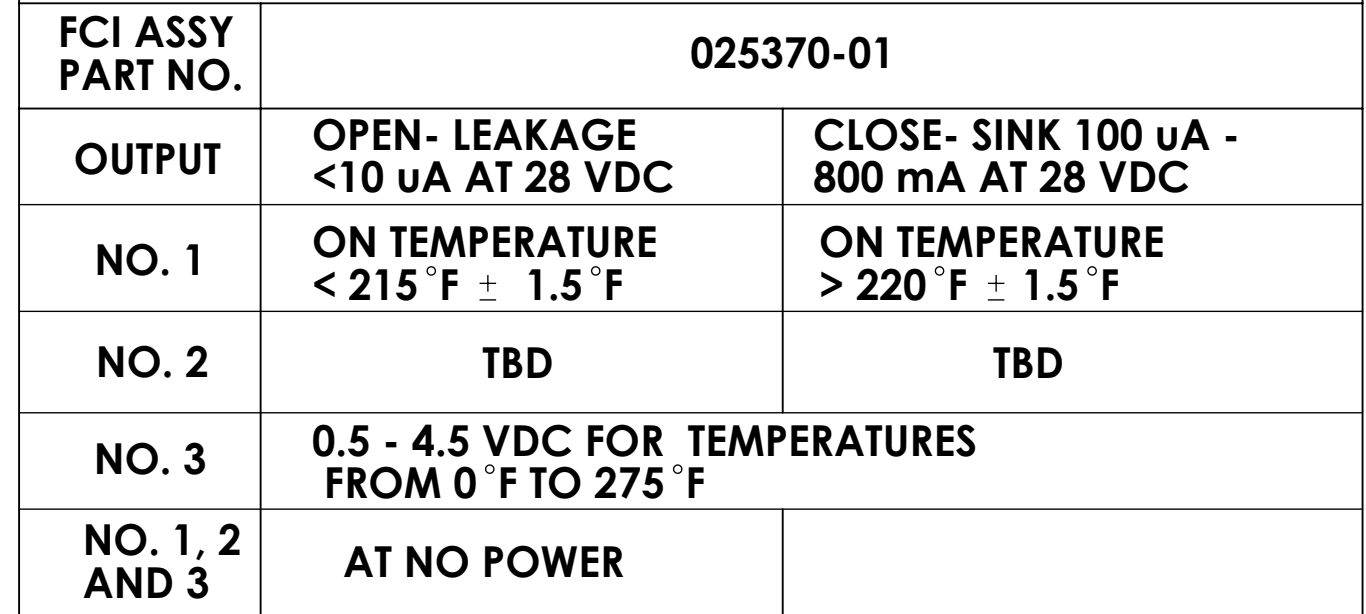

- ## 10 ORIENTATION OF MASTER KEYWAY IS NOT CRITICAL.

9. THREAD PROTECTION AND A CONNECTOR CAP SHALL BE INSTALLED AND SHIPPED WITH EACH SWITCH.

8. WEIGHT: .50 LBS MAXIMUM

**7. PRESSURE: 150 PSIG MAX
225 PSIG BURST**

6 TEMPERATURE SET POINTS PER TABLE.

5. TEMPERATURE STORAGE RANGE -60°F TO +160°F.


4. MEDIA TEMPERATURE OPERATION RANGE -40 °F TO +275 °F

**3 PERMANENTLY MARKED IDENTIFICATION INFORMATION
PER MIL-STD-130, .05 MIN HT, APPROX WHERE SHOWN,
SERIAL NO. (SN) TO BE ASSIGNED PER JOB
ORDER/CUSTOMER ORDER.**

2. MATERIAL: STAINLESS STEEL 300 SERIES PASSIVATED PER SAE-AMS-2700, METHOD 1, TYPE 6 OR 7.

1. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-2009.

NOTES: UNLESS OTHERWISE SPECIFIED

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ANGULAR .X ±.1 ±1/2° .XX ±.03 .XXX ±.010		APPROVALS		FLCI® FLUID COMPONENTS INTERNATIONAL LLC SAN MARCOS, CA 92078					
				APPROVALS							
				PRODUCT CERT APVL		DRAWN 7/29/2019					
				N/A		Erik Davies					
		CONTRACT 7/29/2019		CHECK 7/29/2019		TITLE SWITCH, TEMPERATURE, SET POINTS AND VOLTAGE OUTPUT					
(025370-XX)		Melissa Moisant		Gary Bussett							
NEXT ASSY	USED ON	MFG ENGR		ENGR 7/29/2019							
APPLICATION		N/A		Gary Bussett							
THIRD ANGLE PROJECTION 		MATERIAL 		MATL MGMT		SIZE C CAGE CODE 64818 DWG NO. 025369 REV C					
		N/A		N/A							
		MFG 7/30/2019		AERO QUAL 7/29/2019							
		Scott Miller		Gary Bussett							
		MACH SURFACE FINISH: 125 RMS MAX		MACH RAD .030		QA 7/30/2019		NUC QUAL		SCALE NONE SHEET 1 OF 1	
		DO NOT SCALE DRAWING		Burt Tanaka		N/A					
		PARTS TO BE FREE OF BURRS & SHARP EDGES									

FCI®

**FLUID COMPONENTS
INTERNATIONAL LLC**

SAN MARCOS, CA 92078

TITLE

SWITCH, TEMPERATURE, SET POINTS AND VOLTAGE OUTPUT

SIZE
C

CAGE CODE
64818

DWG NO.	
---------	--

025369

REV
C

SCALE	NONE
-------	------

SHEET	1	OF	1
-------	---	----	---